

## Outdoor use

### Model 52A.01



#### Use

Model 52A.01 is a sliding pass-through with an integrated two-way intercom system that comes ready for installation. It is suitable for use in covered outdoor areas such as pharmacies and fast food restaurants as a drive-through counter.



#### Safety and features

- Sliding pass-through for use as drive-through counter, fits flush with outside facade and features large drawer, front panel and integrated Public 3 intercom for automatic two-way conversation.
- Drawer contains integrated coin trough for easily removing coins.
- Goods and packages up to 350 x 300 x 390 mm in size can be handed over via passthrough.
- Cover is automatically raised when pass-through is opened, and locks automatically in return position. Cover lock can only be released by the operator behind the counter by using the lever.
- Dust and draught sealed thanks to acrylic cover on the operator side.

#### Materials and use

- Drawer unit made of sheet steel and stainless steel.
- Front panel made of 1 mm thick stainless steel, drawer carriage made of 3 mm thick stainless steel.
- All metal parts have been produced using state-of-the-art precision laser cutting technology for ultimate quality.
- Model 52A.01 is suitable for outdoor use in covered areas.
- The unit requires no maintenance. No need for cleaning or lubrication.

## Outdoor use

### Outer dimensions

(all measurements in mm)

Front panel 980 x 530 x 28

### Main pass-through

Width 550

Depth 534

Height 318

### Drawer

Width 363

Depth 530

Height 300


Extension 400

### Weight

120 kg

### Miscellaneous

- Unit also available with PIN pad, debit card reader, or both.
- Also available with rain cover.
- Special sizes available on request.
- Coatings available in RAL colours on request.
- Also available as model 7052 A, as window unit with glass fascia.

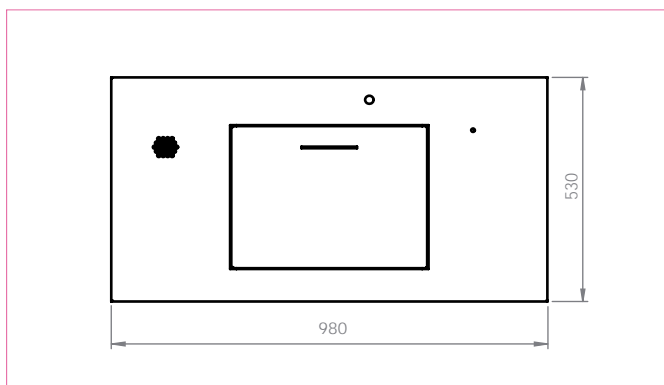

### Walter Wurster GmbH

Heckenrosenstraße 38

D-70771 Leinfelden-Echterdingen

Germany

Telefon: +49 (0) 711 / 9 49 62-0

Telefax: +49 (0) 711 / 7 97 72 90

e-mail: kontakt@IdeeninBlech.de

internet: www.IdeeninBlech.de

### Model 52A.01

### Installation and dimensions

The unit comes ready for mounting in prepared walls or façade recesses. Coming from the outside, it is mounted by inserting into the recess before screwing tight underneath the unit on the inside. Consideration must be given to access requirements and the possible need to remove the unit later in the unlikely event of repairs.

