

Complete Units

Model 7052



Use

Model 7052 is a complete window counter and transfer unit, with a Model 52.01 pass-through for use in covered outdoor areas that comes ready for installation. It is ideal for use as a sales or reception counter for places such as front-desk receptions, gatehouses or petrol station forecourts.



Safety and features

- Window unit with sliding Model 52.01 pass-through for pedestrians, fits flush with outside façade and features small and large drawer, integrated intercom for automatic two-way conversation.
- Small drawer for handing over change and receipts.
- Large drawer ideal for merchandise such as drinks, food, etc.
- Drawer locks automatically when closed.
- Dust and draught sealed.
- Offers firearms protection, capable of withstanding heavy handgun fire in accordance with FB4.
- Model 7052 fulfils German UVV regulations.

Materials and use

- Safety glass adhering to BR4 NS
- Frame made of 2 mm brushed stainless steel.
- Cover panel made of 1 mm brushed stainless steel, cover made of 2 mm brushed stainless steel.
- All metal parts have been produced using state-of-the-art precision laser cutting technology for ultimate quality.
- Model 7052 is suitable for use in covered outdoor areas.
- The unit requires no maintenance. No need for cleaning or lubrication.

Complete Units

Outer dimensions (in mm)

Width	1010
Height	1280
Depth	550

Drawer clearance small/large

Width	92 / 310
Depth	150 / 415
Height	30 / 170
Extension	250 / 265

Mounting, wall recess

970 x 1200 (W x H)

Weight

230 kg


Miscellaneous

- Available in higher firearms-protection classes, eg: FB6
- Available with fire protection up to F90
- Also available with window shutters and illumination
- Special sizes available on request
- Frame coatings available in alternative RAL colours on request

Modell 7052

Installation and dimensions

The window unit comes complete with power cables and is ready for exact mounting in prepared wall sections. It is inserted into the recess from the outside to fit flush with the wall. This is done by removing the inner frame before screwing the unit into place from the inside to prevent tampering. Consideration must be given to access requirements and the possible need to remove the unit later in the unlikely event of repairs. There should be a 230 V socket near the counter on the inner side.

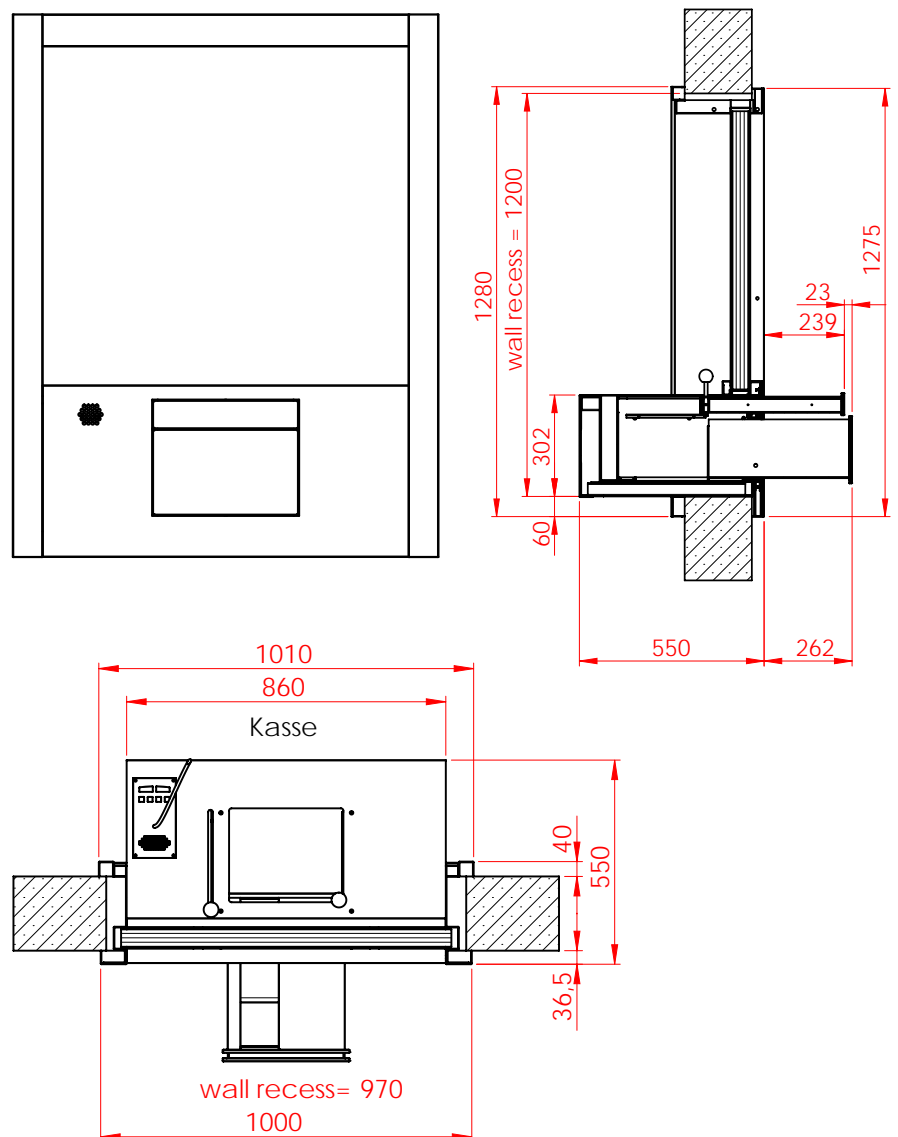

Walter Wurster GmbH

Heckenrosenstraße 38

D-70771 Leinfelden-Echterdingen

Telefon: +49 (0) 711 / 9 49 62-0

Telefax: +49 (0) 711 / 7 97 72 90

e-mail: kontakt@IdeeninBlech.de

internet: www.IdeeninBlech.de